


MULTI VISIO

- Trevira CS fabric with stable structure
- Particularly suited to digital printing
- Standard 100 by Oeko-Tex® certified, free from harmful substances

APPLICATIONS

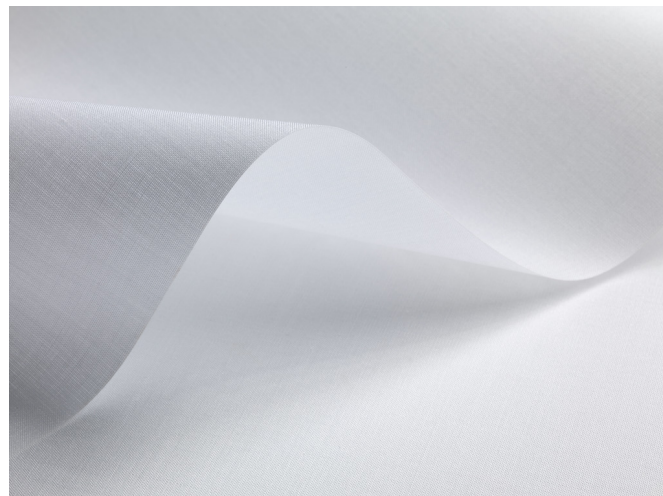

FABRIC PROPERTIES

	Semi transparent
	Polyester Trevira CS
	210 g/m ²
	0.40 mm
	235 cm
	8.9 cm, 12.7 cm, 240 cm

FEATURES / TECHNICAL PROPERTIES

	6-7
	Alpha-w = 0.30
	Flame retardant
	Applicable in humid areas
	Digital printing
	Oeko-Tex
	Laser cutting
	Special colours from 500 m

WASHING INSTRUCTIONS



FLAME RETARDANT

B-s1,d0 (EN 13501-1)
 B1 (DIN 4102-1)
 M1 (NF P 92-503/5/7)
 Type B (BS 5867-2)
 NFPA 701



Multi Visio

OPTICAL AND SOLAR COEFFICIENTS (± 5%, DIN EN 410)

Colour	T _V	T _S	R _S	A _S	T _{UV}	F _C	g _{tot}
01	42.0	41.0	50.0	9.0	32.0	0.63	0.46
02	31.0	35.0	48.0	17.0	23.0	0.64	0.46
03	38.0	38.0	49.0	13.0	25.0	0.64	0.46
08	7.0	28.0	32.0	40.0	7.0	0.74	0.53
20	36.0	39.0	48.0	13.0	22.0	0.65	0.46
21	6.0	25.0	32.0	43.0	6.0	0.74	0.52
26	27.0	35.0	43.0	22.0	15.0	0.68	0.47
27	17.0	31.0	38.0	31.0	10.0	0.71	0.50
51	42.0	40.0	49.0	11.0	31.0	0.64	0.46

T_V Visible light transmission

T_S Solar transmission

R_S Solar reflectance

A_S Solar absorption

T_{UV} UV transmission

F_C Shading factor

g_{tot} Total g-value

F_C + g_{tot}: Value calculated with glass: 0.72 / U_g = 1.6 W/m² K, DIN EN 13363-1

Multi Visio



Colours shown are not binding